

Relay control

FT635 REL AC



FunkTronic
Kompetent für Elektroniksysteme

<u>Inhalt</u>	Page
Technical Data	2
General features	3
Channel switching	4
Option line monitoring	4
Transmitter control	4
Functions of the LEDs	4
Examples	5
Relay operation according to T11-55	6
Jumper	7
Block diagram FT635 REL AC	8
Block diagram DSP	9
Pinout	10
RS232-connecting cable	12
Service program/Adjustment	12
Programming	14
Decoder function	17
Option line monitoring (FT 635 REL ACL)	19
Tontabelle	20
General Safety Instructions	21
Terms and abbreviations	22

Technical Data

Voltage of operation	+12V DC +/- 30%
Current demand	ca. 100 mA
Fuse	1 A, self-resetting
Weight	ca. 525 g
Dimensions W x H x D	104 x 44 x 175 mm
Frequency of pilot tone	ex factory 3300 Hz
Pilot tone decoder	+/- 0,8 % (+/- 26 Hz)
Response time	< 20 ms
Release time	< 40 ms
min. pilot tone level at measuring point	75 mV
Notch filter pilot tone suppression	> 50 dB

2- resp. 4-wire

Input level 2-wire	-10 dBm nominally, 250 mV
Adjustment range 2-wire	-41 dBm to -1 dBm, 7 mV to 700 mV
Input level 4-wire	-9 dBm nominally, 275 mV
Adjustment range 4-wire	-40 dBm to +1 dBm, 8 mV to 850 mV
Input impedance	2-wire Zr or 600 Ohm, 4-wire 600 Ohm
Output level 2-wire	-10 dBm, 250 mV (alternatively: -19 dBm, 190 mV)
Pilot tone 2-wire	-12 dBm, 200 mV
Output level 4-wire	-14 dBm, 150 mV (alternatively: -5 dBm, 450 mV)
Pilot tone 4-wire	-16 dBm, 125 mV
Output impedance 2-wire	Zr or 600 Ohm
Output impedance 4-wire	600 Ohm

Interface radio device resp. desk top control

Input level	ex factory setting + 3 dBm, 1100 mV
Adjustment range	- 24 to + 6 dBm, 50 mV to 1550 mV
Input impedance	600 Ohm
Output level	ex factory setting - 17 dBm, 100 mV
Adjustment range	- 30 to + 8 dBm, 25 mV to 2000mV
Output impedance	600 Ohm

General features

The FT635 REL AC relay control is used to operate a relay. A connection with a two or four wire cable is also possible. With that very long distances can be bridged, depending on the cable attenuation.

All versions of the FT635 REL AC

- Relay function radio in to radio out
- 2 or 4-wire connection (selectable by jumper)
- Impedance 600 Ohm or Zr (selectable by jumper) (Zr only for 2-wire)
- Connector radio device --> AF-in/output and PTT
- Pilot tone decoder 3300 Hz or DC-decoder
- Serial interface RS232 to adjust and program
- All levels adjustable with RS232
- All AF-in/outputs galvanically separated (transformer)
- Remote channel switching by 5-tone sequences
- Programmable pilot tone encoder
- DC-encoder
- 8 digital inputs
- 8 digital outputs

Option line monitoring

The connection of the 2-/4-wire is constantly monitored by the option line monitoring.

The FT635 REL AC relay control is available in a black flange aluminum housing.



- black flange aluminum housing

Channel switching

Remote switching of channels is achieved by transmitting certain 5-tone sequences. The interface to the two-way radio device is parallel. The channel output can be "binary", "binary-1", "decimal" and "2xBCD". The channel output can be inverted if necessary. Remote channel switching is done via the line-in.

Option line monitoring

In order to configure the operating mode line monitoring a device with this option is needed at both ends of the line. Line monitoring is only active during idle times.

For this one of the devices has to be configured as master, the other device as slave. The master device then scans the slave device in certain intervals. If there is no reply or the slave-device doesn't receive a scan by the master-device within a certain interval, one of the switching outputs can be programmed as error indicator.


Transmitter control

The transmitter control is activated as soon the AC-line has received and decoded the pilot tone. Then the PTT-output is switched by a potential-free relay. The PTT output can also be controlled by DC- or AF-decoding (register 053/1). The line-input is switched through to the radio even if the relay is active. In that case line has priority over radio.

Functions of the LEDs

The **green LED** is always on when the relay is active or the pilot tone has been decoded by the AC-line or when a DC potential is applied or AF has been decoded, depending on the configuration. The green LED blinks when there is a decoding, but the switching of the transmitter relay is suppressed.

The **yellow LED** is on when the pilot tone has been activated or DC has been applied to the line or the AF has been connected to the line. The yellow LED blinks when the activation of one of the aforementioned functions has been suppressed.

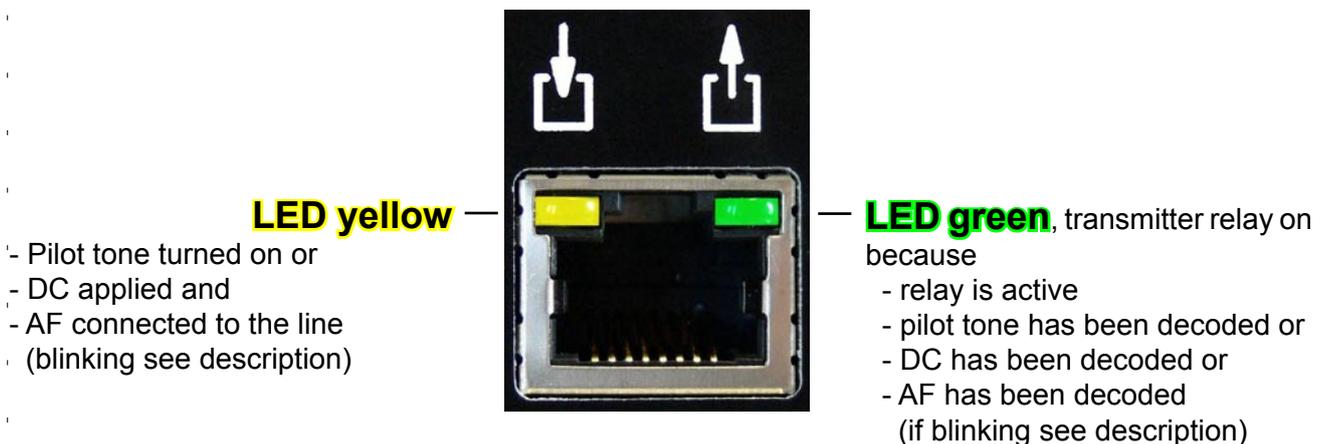


Examples

Depending on the setup of the radio installation the FT635 REL AC is used together with different other FunkTronic modules. The following questions should be answered when planning:

- Connection of the FT635 REL AC to an operation terminal and a two-way radio
- Remote channel switching necessary
- Line monitoring necessary
- 2- or 4-wire connection, simplex or duplex
- Connected to FT634aC or operating terminal

Example 1: 2- or 4-wire remote control via private lines

Major 4a or 5a

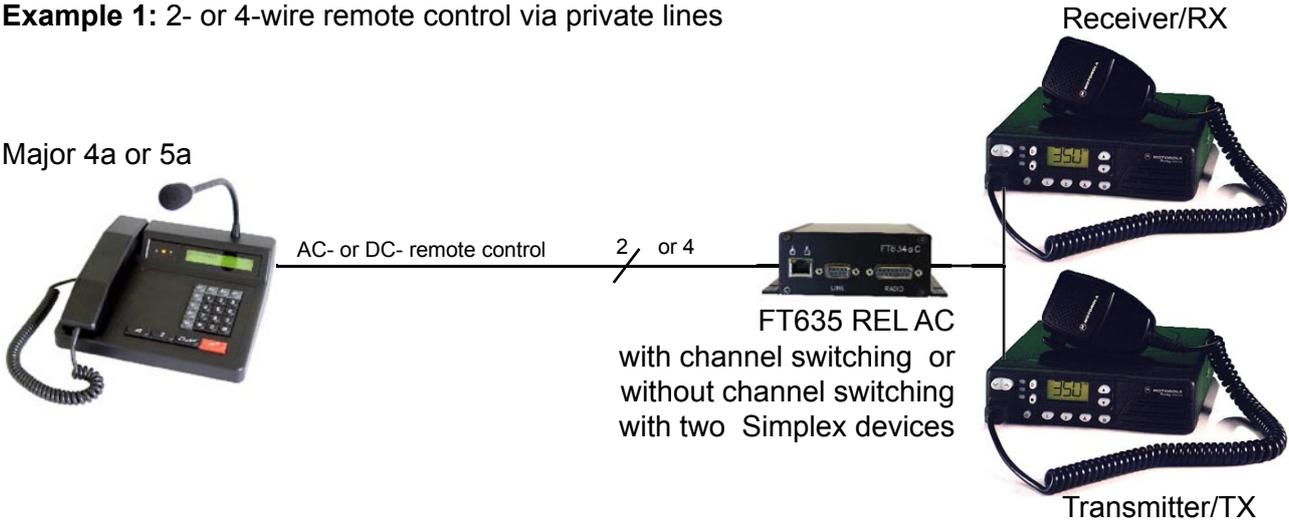


Example 2: Parallel circuit of several operation terminals --> LIM AC has to be equipped with notch for pilot tone.

On private lines the remote control can be carried out by DC.


In this case the two LIM AC and the notch filters for the pilot tone are needed.

Major 5a

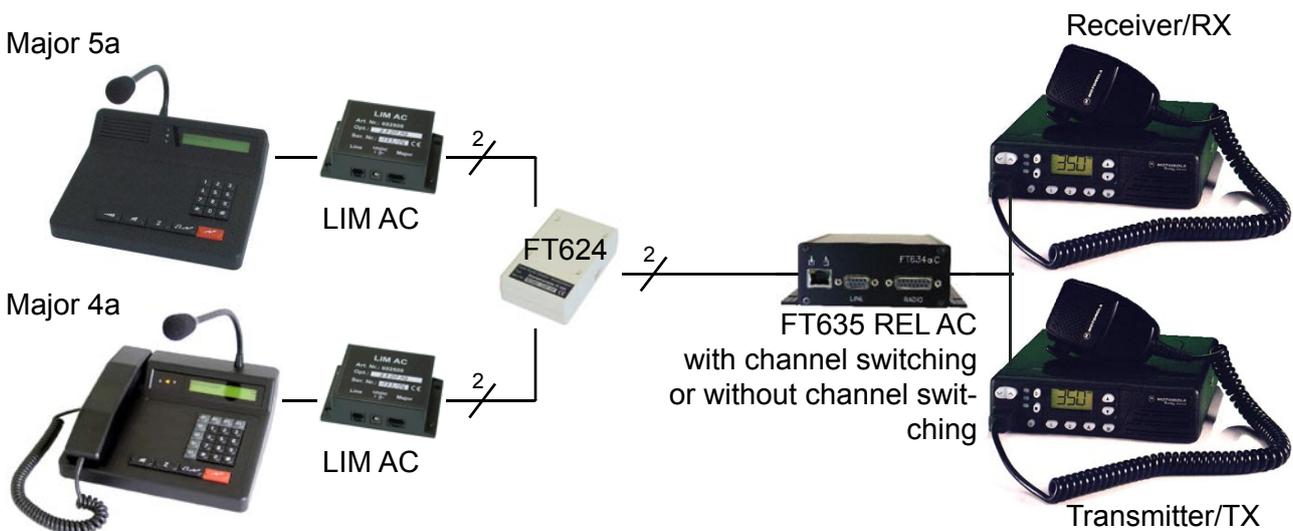


Example 3: 2- or 4-wire remote control via leased lines

Major 4a, 5a or 6

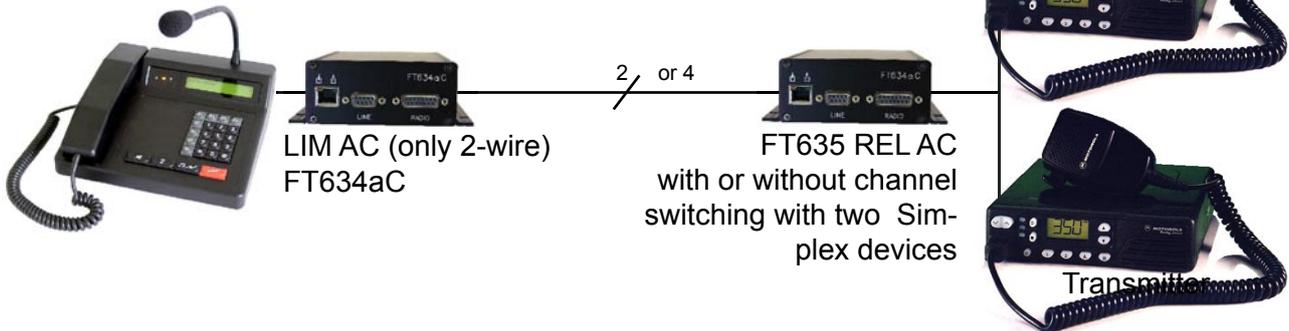

Example 4: Operation terminal Major 6 via 2-wire to the multi-channel radio set (with the option of line monitoring)

Major 6, 4a or 5a

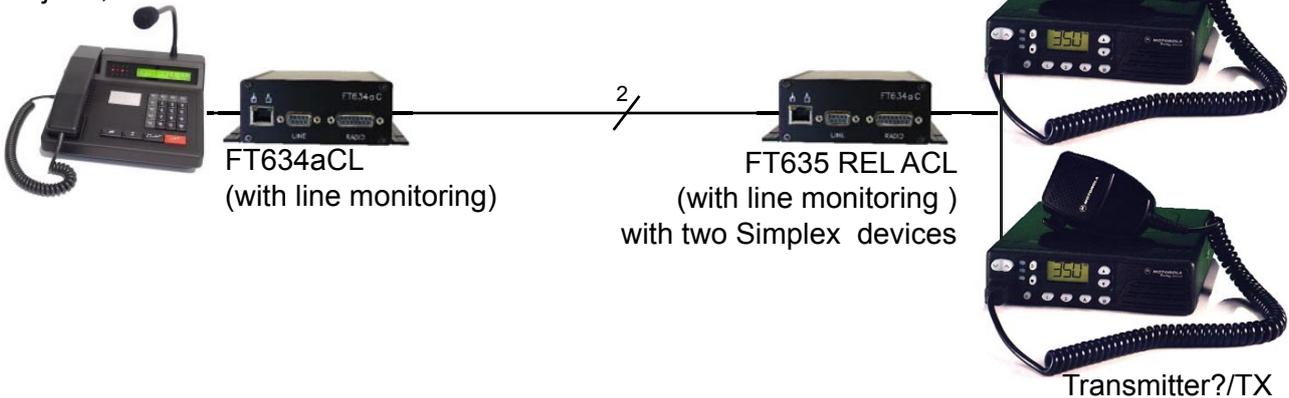

Relay operation according to T11-55

When operating the relay according to „T11-55“ the carrier of the transmitting channel is monitored by an input (I/O0-I/O15) and the starting of the relay is impossible if the channel is active. For this an I/O has to be programmed as T11-55 squelch input.


Listening in with 4-wire connection

The FT635 REL AC also supports listening in on the transmitted AF on a 4-wire connection.

Jumper


Different configurations can be adjusted with the internal jumpers. For example you can choose between 2- or 4-wire connections. The functions of the different jumpers are printed directly onto the circuit board.

Jumper setting normal, 2D, Zr, AC (ex factory)

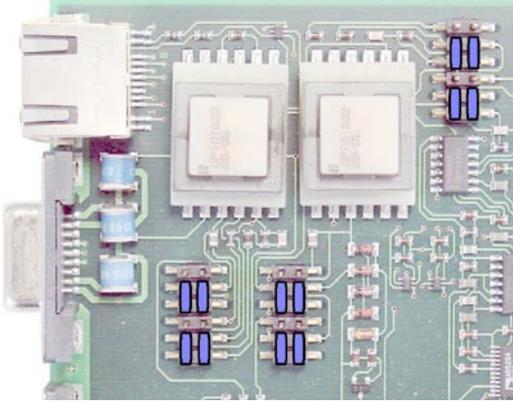


- 2D = 2-wire
- 4D = 4-wire
- Zr = complex impedance
- 600 = real impedance 600 Ohm
- AC = remote control by AC voltage
- DC = remote control by DC voltage
-  = jumper


Jumper setting 2D, Zr, DC

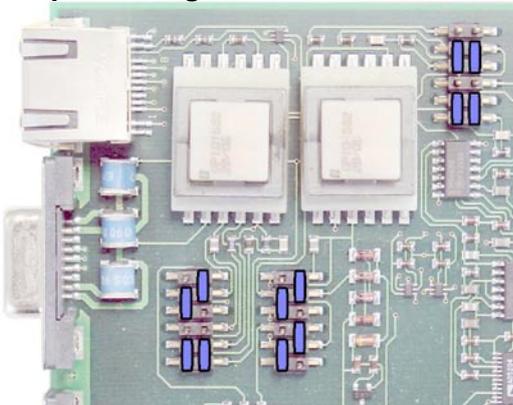


Jumper setting 2D, 600 Ohm, AC

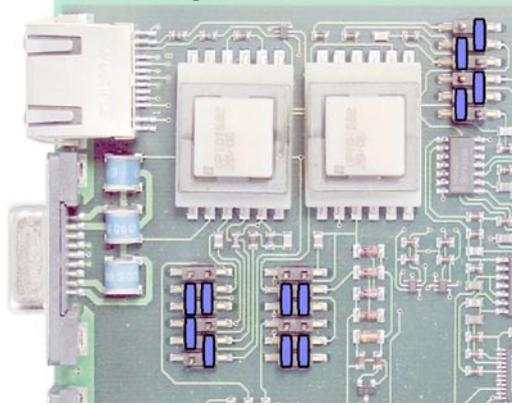


Jumper setting 2D, 600 Ohm, DC

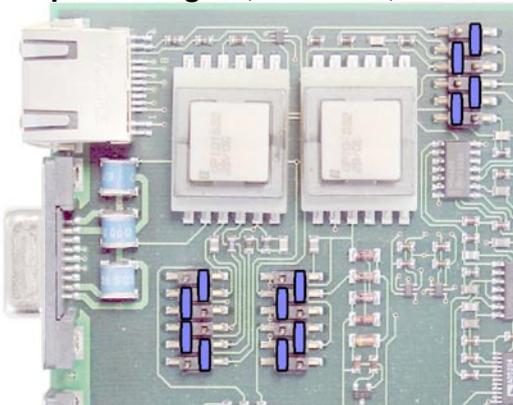


Jumper setting 4D, 600 Ohm, DC

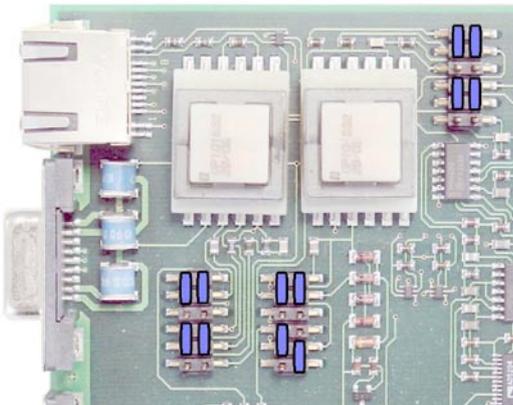

Jumper setting 4D, 600 Ohm, AC


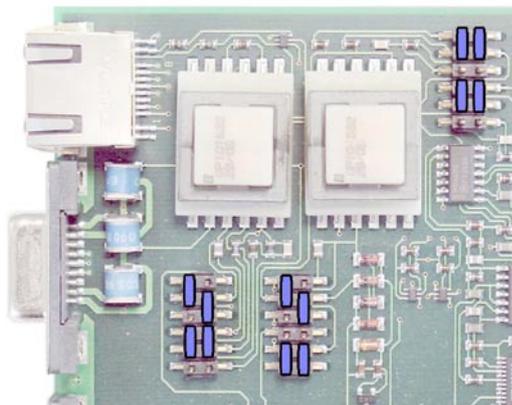


Block diagram DSP

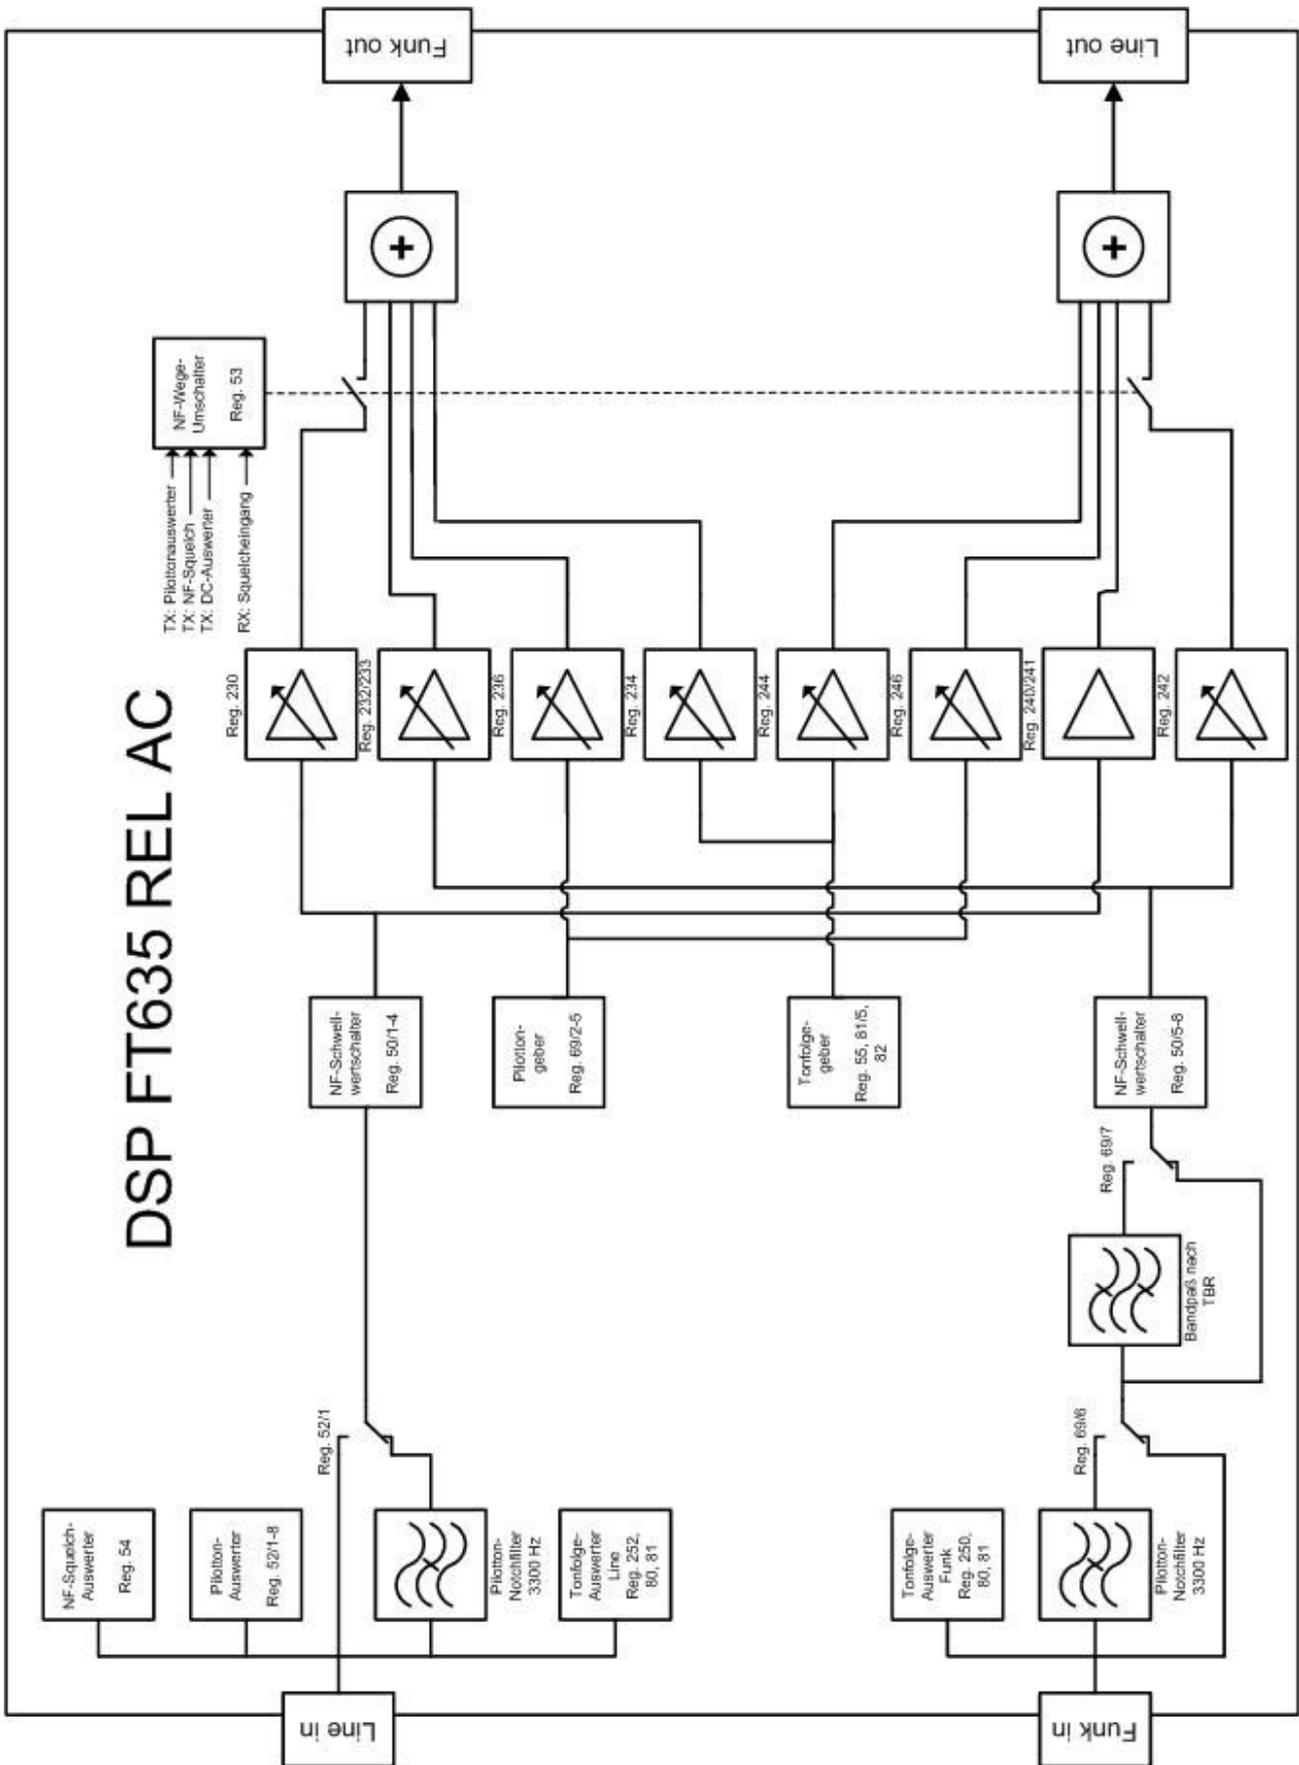

Pinout

Pinout of the FT635 REL AC

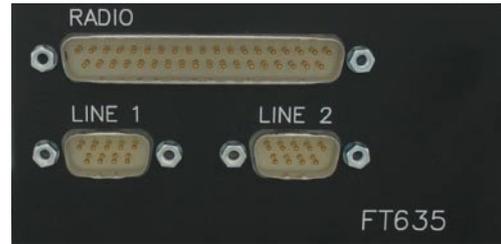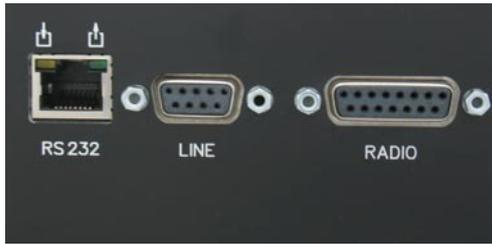

8-pole Western jack "RS232"

- pilot tone on or
- DC on and
- AF connected to line
(if blinking see description)

LED green, transmitter relay on because

- relay active
- pilot tone decoded or
- DC decoded or
- AF decoded
(if blinking see description)

I/O 12 (in/output)	8	
I/O 11 (In/output)	7	
I/O 10 (in/output)	6	
I/O 09 (in/output)	5	
I/O 08 (in/output)	4	
GND (in/output)	3	
RS232 RxD (input)	2	
RS232 TxD (output)	1	

9-pole Sub-D jack "LINE" and "LINE 1"

I/O: line, 2D, 4D out	1	
free	2	
I/O: GND	3	
free 4	4	
I/O: line, 2D, 4D in	5	
	6	OUT: line, 4D out
	7	I/O: I/O 13 (Pull-up 5V)
	8	I/O: I/O 4 (o.C.)
	9	IN: line, 4D in

15-pole Sub-D jack "RADIO"

IN : + 12 V	1		9	IN: + 12 V
OUT: PTT-Relay	2		10	IN: squelch
OUT: PTT-Relay			11	IN: radio, AF in
OUT: radio, AF out	4		12	IN: radio, AF in
OUT: radio, AF out	5		13	I/O: I/O 2 (o.C.)
I/O: I/O 0 (o.C.)	6		14	I/O: I/O 3 (o.C.)
I/O: I/O 1 (o.C.)	7		15	I/O: GND
I/O: GND	8			



37-pole Sub-D plug male connector (except for PTT like FT633):




1	GND	20	+12V
2	PTT Relay	21	PTT Relay
3	free	22	I/O15
4	I/O14	23	I/O13
5	I/O12	24	I/O11
6	I/O10	25	I/O9
7	I/O8	26	I/O7
8	I/O6	27	I/O5
9	I/O4	28	I/O3
10	I/O2	29	I/O1
11	I/O0	30	free
12	free	31	free
13	Line 4D out	32	RXD (FT635)
14	TXD (FT635)	33	analog 2 in
15	Line 4D in	34	analog 1 in
16	Line 2D / 4D in	35	squelch
17	Line 2D / 4D out	36	radio in
18	radio in	37	radio out
19	radio out		

The radio device can be connected either by the 15pole SubD connector (radio) in the front or by the 37pole SubD connector (radio) in the back. The line can be connected either by the 9pole SubD connector (line) on the front or by the 9pole SubD connector (line 1) in the back. The pinout on both connectors is the same.

RS232-connecting cable

Computer equipped with RS232 9-pole jack

RS232 jack on FT635 REL AC

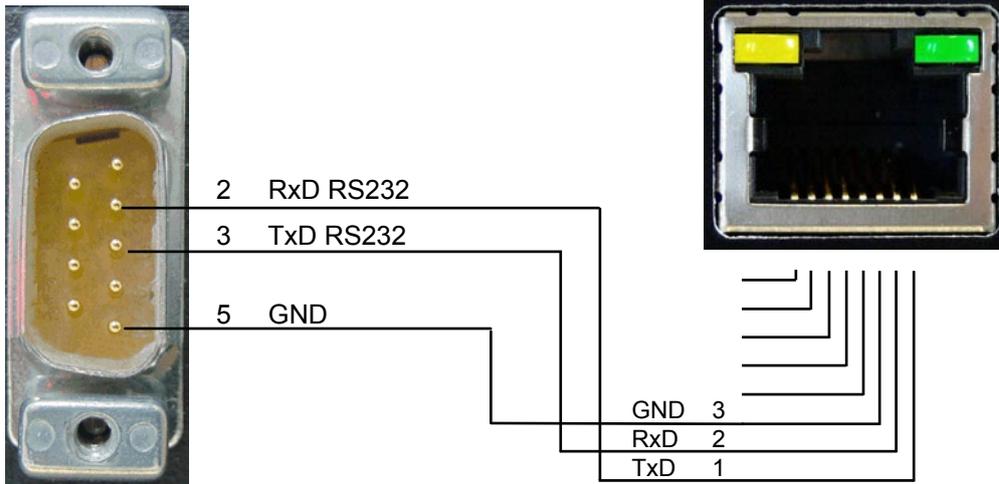

Service program/Adjustment

The *FT 635 REL AC* has a *RS-232 interface* with the following specifications:

**9600 Baud, 1 Startbit, 8 Data bits, No Parity, 1 Stop bit,
np protocol or Xon/Xoff**

For communication with Windows e.g. the terminal program "HyperTerminal" can be used. For Linux we recommend the program minicom.

After hitting the key ENTER the terminal program prompts you for input. You have the following choices:

```
Online - Monitor FT635 REL AC
-----

Software: FT635REL
Version : V1.00
SW-Datum: 17.10.06

Rxxx.....read register xxx
Pxxx yyyyyyyy.....program register xxx with yyyyyyyy
A.....adjust potentiometer
Tx.....TX-relay on/off (1/0)
Kxx.....switch channel xx (00-99,?)
Ixxxx.....tone generator on with xxxxHz
$xxxxx .....transmit tone sequence xxxxx
Q.....reset software
X.....end monitor
```

After hitting the key A the monitor prompts you for adjustment with the following screen:

```
Which potentiometer is to be adjusted?
1: input of line - amplification
2: input of line - equalization
3: output to two-way radio
4: input of two-way radio
x: end
```

The screen for potentiometer 1:

(The actual reading of the internal reference value is shown after changing or blank key)

```
Adjustment potentiometer 1:
Feed with required level into line-input at 1000Hz.
Adjust ,Line` to 300mV at internal reference value.
Initial value: adjustment potentiometer 1:
Feed with required level into line-input at 1000Hz.
Adjust ,Line` to 300mV at internal reference value.
Initial value: 014 (min:000 max:255) level: 000 mV reference value:
300 mV
Keys:  <+> : +1
        <*> : +10
        <-> : -1
        <_> : -10
        < > : measuring only
        <a> : self-adjustment
        <p> : programming
        <x> : cancel
```

The screen for potentiometer 2:

```
Adjustment potentiometer 2:
Feed with required level at line-input at 3400Hz.
Adjust ,Line` to 300mV at internal reference value.
Initial value: 057 (min:000 max:255) level: 000 mV required value:
300 mV
Keys:  <+> : +1
        <*> : +10
        <-> : -1
        <_> : -10
        < > : measuring only
        <a> : self-adjustment
        <p> : programming
        <x> : cancel
```

The screen for potentiometer 3:

```
Adjustment potentiometer 3:
Feed with required level at line-input at 1000Hz.
Adjustment potentiometer 1 and 2 (reference value ,Line` = 300mV).
Adjustment radio-output at required level (required modulation
depth).
Initial value: 015 (min:000 max:255)
Keys:  <+> : +1
        <*> : +10
        <-> : -1
        <_> : -10
        <t> : transmitter on/of
        <p> : programming
        <x> : cancel
```

The screen for potentiometer 4:

```
Adjustment potentiometer 4
Feed at radio-input with required level at 1000Hz.
Adjust at internal reference value ,Radio` to 300mV.
Initial value: 160 (min:000 max:255) level: 000 mV required value:
300 mV
Keys:  <+> : +1
        <*> : +10
        <-> : -1
        <_> : -10
        < > : measuring only
        <a> : self-adjustment
        <p> : programming
        <x> : cancel
```

- 050** 03100320 AF-mute level
1.+2. digit: ca. $nn \cdot 0,9\text{mV}$ threshold AF-mute line > radio activate
3.+4. digit: ca. $nn \cdot 0,9\text{mV}$ threshold AF-mute line > radio deactivate
5.+6. digit: ca. $nn \cdot 0,9\text{mV}$ threshold AF-mute radio > line activate
7.+8. digit: ca. $nn \cdot 0,9\text{mV}$ threshold AF-mute radio > line deactivate
- 052** 12500128 Pilot tone
1. digit: pilot tone filter frequency
0=no filter
1=3300Hz
2=3000Hz
3=2800Hz
4=3320Hz
5=2982Hz
6=3850Hz
2. digit: pilot tone detection, $n \cdot 5\text{ms}$ decoding until on
3. digit: pilot tone detection, $n \cdot 5\text{ms}$ no decoding until off
4. digit: pilot tone decoder frequency (like 1.digit), if 1.digit=0
5.-8. digit: pilot tone detection, min.level (0-9999) 0128=75mV,
*2=-3dB;/2=+3dB sensitivity
- 053** 12211220 TX-configuration
1. digit: TX-decoder 0=off, 1=PIL, 2=DC, 3=PIL+DC, 4=AF-Squelch
2. digit: operating mode:
0=4-wire, low amplification of line (-25...0dBm)
1=4-wire, high amplification of line (-40...-15dBm)
2=2-wire, low amplification of line (-25...0dBm)
3=2-wire, high amplification of line (-40...-15dBm)
3. digit: priority
0=none
1=RX before TX, radio has priority over line
2=TX before RX, line has priority over radio
3=first come, first served...
4. digit: AF-directions without RX, without TX
5. digit: AF-directions with RX, without TX
6. digit: AF-directions without RX, with TX
7. digit: AF-directions with RX, with TX
4. to 7. digit: 0=RADIO>LINE off, LINE>RADIO off
1=RADIO>LINE on, LINE>RADIO off
2=RADIO>LINE off, LINE>RADIO on
3=RADIO>LINE on, LINE>RADIO on
8. digit: line amplification
0= auto, amplification low at 4-D, high at 2-D
1=amplification low
2=amplification high
RX meaning SQL-input (056/1), TX means TX-decoder (053/1)
- 054** 02604010 AF-squelch configuration
1.-2. digit: $n \cdot 5\text{ms}$ above threshold, until SQL on
3.-4. digit: ca. $nn \cdot 1,8\text{mV}$ threshold AF on
5.-6. digit: $n \cdot 5\text{ms}$ below threshold, until SQL off
7.-8. digit: ca. $nn \cdot 1,8\text{mV}$ threshold AF off
- 055** 10100000 Advance time register
1.+2. digit: $nn \cdot 10\text{ms}$ advance time
3.+4. digit: $nn \cdot 10\text{ms}$ delay time

- 056** 00051205 Squelch configuration
- 1. digit: squelch input
 - 0: active low, pullup on
 - 1: active high, pullup off
 - 4: active low, pullup off
 - 5: active high, pullup on
 - 3.+4. digit: nn*10ms TX-blocking period after own AF on line, only 2-wire
 - 5.+6. digit: nn*10ms TX-blocking period after own DC on line, only 2-wire
 - 7.+8. digit: nn*10ms TX-blocking-period after own pilot tone on line, 2-wire
- 057** 00000000 1. digit: language of online monitor
- 0: German
 - 1: English
 - 2: French
 - 3: Dutch
 - 4: Italian
- 063** BCD00000 Channel remote switching register
- 1.-3. digit: digit 1-3 of the channel remote switching tone sequence
- 064** 00100000 Channel register
- 1. digit: save channel y=1, n=0
 - 2.+3. digit: channel 00-99
- 065** 30100000 Blocking-periods for RX and TX
- 1.+2. digit: nn * 10 ms before channel switching
 - 3.+4. digit: nn * 10 ms after channel switching
- 066** 01080000 Channel configuration
- 2. digit: channel output
 - 0=none
 - 1=decimal
 - 2=binary-1
 - 3=binary
 - 4=2xBCD
 - 3. digit: channel output
 - 0=channel output normal
 - 1=channel output inverted
 - 4. digit: number of channel bits (0-8)
 - 5. digit: channel acknowledgement
 - 0=channel acknowledgement normal (BCDxy)
 - 1=channel acknowledgement Major6 (CBDxy)
 - 2=channel acknowledgement normal with line activation (like 069/1)
 - 3=channel acknowledgement Major6 with line activation (like 069/1)
 - 7. digit: substitution channel bit for I/O4, if I/O4 is used for line activation (register 069/1=3)
- 069** 00000100 RX-configuration
- 1. digit: RX-signaling to line
 - 0=programmed pilot tone
 - 2=DC
 - 3=I/O4
 - 4=PTT at 9pole DSub line connector ST2, Pin8
 - 2.-5. digit: pilot tone frequency in Hz
 - 6. digit: pilot tone filter frequency
 - 0=no filter

1=3300Hz
2=3000Hz
3=2800Hz
4=3320Hz
5=2982Hz
6=3850Hz

7. digit: line filter, 0=off, 1=on (bandpass 300-3400Hz)

- 070** 30005010 Relay radio>radio configuration 1
1.-3.digit: max. relay call duration (nnn * 1s)
4.-6.digit: relay follow-up time (nnn * 100ms)
7.digit: relay can be activated y/n (1/0) - 0 blocks all relay functions
- 071** 04500000 Relay radio>radio configuration 2 (T11-55)
1.digit: relay operation according to „T11-55“ y/n (1/0)
2.+3.digit: max. waiting period for free channel (nn * 1s)
- 072** EEEEE000 Tone sequence for relay start
1.-5.digit: 5-tone sequence for relay start
- 073** F0000000 Relay radio>radio configuration 3
1.digit: relay start induced by single-tone of the tone sequence (0-E, F=off)
2.digit: relay start induced by carrier y/n (1/0)
3.digit: relay start induced by special tone of : of/call1/call2/call1+2 (0/1/2/3)
- 080** 01810000 Decoder reference 1
1.-3. digit: nnn*5ms max. tone duration 1. tone
4.+5. digit: nn*5ms min. tone duration all tones
- 081** 01800000 Decoder reference 2
1.-3. digit: nnn*5ms max. tone duration from 2. tone on
5. digit: tone call system 0:ZVEI, 1:CCIR, 2:ZVEI2, 3:EEA
- 082** 07707000 Encoder reference
1.+2. digit: nn * 10ms tone duration 1. tone
3. digit: n * 10ms tone duration all other tones
- 083** 10001000 Tone duration single-tone and special tone decoder
1.+2.digit: minimal tone duration single-tone decoding *100ms (für Reg.073/1)
3.+4.digit: maximal tone duration single-tone decoding *100ms
00 = decoding as soon as minimal duration is reached
>00= decoding, if tone duration is between min and max
5.+6.digit: minimal tone duration special tone decoding *100ms (for reg.073/3)
7.+8.digit: maximal tone duration special tone decoding *100ms
00 = decoding as soon as minimal duration is reached
>00= decoding, if tone duration is between min and max
- 103** DCBCDCBC Configuration switching inputs FT634C
1.-4. digit: tone sequence digit 1-4
5.-8. digit: expected acknowledgement
- 108** 00000000 Function input 0 (I/O00) passive>active
109 00000000 Function input 0 (I/O00) active>passive
.
.
.
138 00000000 Function input 15 (I/O15) passive>active
139 00000000 SFunction input 15 (I/O15) active>passive

Function T11-55 carrier SQL in:
 1.digt: 3
 2.digit: active/passive (1/0)
 example: I/O8 is to be T11-55 carrier SQL in

124	31000000		
125	30000000		
230	00025560	4.-8. digit:	Multiplier for output level line>radio (0-32768)
232	00025560	4.-8.digit:	Multiplier for output level radio>radio, if relay is on and the AF line>radio is off (0-32768)
233	00000000	4.-8.digit:	Multiplier for output level radio>radio, if relay is on and the AF line>radio is on (0-32768)
234	00008300	4.-8. digit:	Multiplier for output level tone>radio (0-32768)
236	00000000	4.-8. digit:	Multiplier for output level pilot>radio (0-32768)
240	00000000	4.-8.digit:	Multiplier for output level line>line without AF radio>line (0-32768)
241	00000000	4.-8.digit:	Multiplier for output level line>line with AF radio>line (0-32768)
242	00025560	4.-8. digit:	Multiplier for output level radio>line (0-32768)
244	00008300	4.-8. digit:	Multiplier for output level tone>line (0-32768)
246	00006400	4.-8. digit:	Multiplier for output level pilot>line (0-32768)
250	00000128	4.-8. digit:	min. level for tone decoding of radio (0-32768)
251	00000128	4.-8. digit:	min. level for tone decoding of the line (0-32768)

Decoder function

The FT635 REL AC has 30 decoder registers and each has a corresponding configuration register. At present there is only the decoder function ,switching output `.

The following registers are used for the decoder functions:

- 000 decoder 1
- 001 decoder 2
- 002 decoder 3
- 003 decoder 4
- 004 decoder 5
- 005 decoder 6
- 006 decoder 7
- 007 decoder 8
- 008 decoder 9
- 009 decoder 10
- 020 decoder 11
- 021 decoder 12
- 022 decoder 13

023 decoder 14
024 decoder 15
025 decoder 16
026 decoder 17
027 decoder 18
028 decoder 19
029 decoder 20
200 decoder 21
201 decoder 22
202 decoder 23
203 decoder 24
204 decoder 25
205 decoder 26
206 decoder 27
207 decoder 28
208 decoder 29
209 decoder 30

000-009, 020-029, 200-209:

1.-8.St.: 0-E = tone (of the tone sequence), which is to be decoded

F = each tone is accepted at this position

All unused tones have to be programmed with ,F'!!!

010 configuration for decoder 1
011 configuration for decoder 2
012 configuration for decoder 3
013 configuration for decoder 4
014 configuration for decoder 5
015 configuration for decoder 6
016 configuration for decoder 7
017 configuration for decoder 8
018 configuration for decoder 9
019 configuration for decoder 10
030 configuration for decoder 11
031 configuration for decoder 12
032 configuration for decoder 13
033 configuration for decoder 14
034 configuration for decoder 15
035 configuration for decoder 16
036 configuration for decoder 17
037 configuration for decoder 18
038 configuration for decoder 19
039 configuration for decoder 20
210 configuration for decoder 21
211 configuration for decoder 22
212 configuration for decoder 23
213 configuration for decoder 24
214 configuration for decoder 25
215 configuration for decoder 26
216 configuration for decoder 27
217 configuration for decoder 28
218 configuration for decoder 29
219 configuration for decoder 30

010-019, 030-039, 210-219:

1.digit: 0 = no decoding

1 = decoding of the line

2 = decoding of the radio

3 = decoding of the line or of the radio

2.digit: 5-F = number of tones in the tone sequence (5-15 tone sequence)

(the correct number of tones and the first 8 tones are always compared to the decoding register)

3.digit: 0 = function 0: switching output

when function switching output:

4.digit: 0-F = number of the switching output I/O 0 - I/O 15

5.digit: 0 = switching output for the set time off

1 = switching output for the set time on

E = toggle switching output (on-off-on....)

6.-8.digit: nnn * 100ms switching time, 000 = without time limit

095 configuration I/O 0-7

096 configuration I/O 8-15

095-096:

1.digit: 0 = I/O 0 (8) is output

1 = I/O 0 (8) is input

...

8.digit: 0 = I/O 7 (15) is output

1 = I/O 7 (15) is input

Example: 5-tone sequence 12345 from radio shall activate I/O 15 for 3 seconds:

020: 12345FFF

030: 250F1030

096: xxxxxxx0

Option line monitoring (FT 635 REL ACL)

The line monitoring operates like the one in the FT634CL. The operating mode line monitoring can be configured for the FT635 REL ACL. To do this devices with this option are needed at both ends of the line. (e.g. FT634aCL and FT635 REL ACL).

Line monitoring is only active during idle times of the wire, that means only when there is neither a transmitting nor a squelch situation. For this, one of the devices has to be configured as master, the other as slave. The master device then scans the slave device in certain intervals (master cycle time). The slave device then answers. If there is no reply or if the slave device doesn't receive a scan by the master device within a certain interval (slave cycle time) one of the switching outputs (0...15) can be programmed as error display or alarm indicator.

The tone sequence for line monitoring (digits 1..4) can be configured in the EEPROM register 090. Ex factory this identification is set at 'BCBC'. At the 2. digit of the EEPROM register 091 you can program if the line monitoring telegrams shall be transmitted with pilot tone. All parameters for the line monitoring are configured in the EEPROM registers 090-092 according to the following list:

register 090 tone sequence for line monitoring (1...4 digit)

register 091

1. digit line monitoring

0 = OFF

1 = as master device

2 = as slave device

2. digit line monitoring telegrams with pilot tone YES/NO (1/0)

3.-5. digit cycle time nnn*6s

register 092

1.-8. digit error or alarm indicator on switching output 0-7

register 093

1.-8. digit error or alarm indicator on switching output 8-15

(As standard the switching outputs 8-15 are deactivated - they are configured as inputs.)

programming of the digits in register 092/093:

0=nothing, 1=output low active, 2=output high active

Example for programming:

register 090: BCBC0000

register 091: 10050000 (master, 5min cycle time) or.:

register 091: 20100000 (slave, 10min cycle time)

register 092: 10000000 (output I/O 0 is error output)

Tontabelle

Tonetable					
Tone	ZVEI 1	CCIR	ZVEI 2	EEA	ZVEI 3
0	2400 Hz	1981 Hz	2400 Hz	1981 Hz	2200 Hz
1	1060 Hz	1124 Hz	1060 Hz	1124 Hz	970 Hz
2	1160 Hz	1197 Hz	1160 Hz	1197 Hz	1060 Hz
3	1270 Hz	1275 Hz	1270 Hz	1275 Hz	1160 Hz
4	1400 Hz	1358 Hz	1400 Hz	1358 Hz	1270 Hz
5	1530 Hz	1446 Hz	1530 Hz	1446 Hz	1400 Hz
6	1670 Hz	1540 Hz	1670 Hz	1540 Hz	1530 Hz
7	1830 Hz	1640 Hz	1830 Hz	1640 Hz	1670 Hz
8	2000 Hz	1747 Hz	2000 Hz	1747 Hz	1830 Hz
9	2200 Hz	1860 Hz	2200 Hz	1860 Hz	2000 Hz
A	2800 Hz	2400 Hz	886 Hz	1055 Hz	886 Hz
B	810 Hz	930 Hz	810 Hz	930 Hz	810 Hz
C	970 Hz	2247 Hz	740 Hz	2247 Hz	740 Hz
D	886 Hz	991 Hz	680 Hz	991 Hz	680 Hz
E	2600 Hz	2110 Hz	970 Hz	2110 Hz	2400 Hz
Duration	ZVEI 1	CCIR	ZVEI 2	EEA	
min.	52.5 ms	75 ms	52.5 ms	30 ms	52.5 ms
typ.	70 ms	100 ms	70 ms	40 ms	90 ms
max.	87.5 ms	125 ms	87.5 ms	50 ms	87.5 ms

General Safety Instructions

Please read the operating instructions carefully before installation and setup.

The relevant regulations must be complied to when working with 230V line voltage, two-wire-lines, four-wire-lines and ISDN-lines. It is also very important to comply to the regulations and safety instructions of working with radio installations.

Please comply to the following safety rules:

- All components may only be mounted and maintained when power is off.
- The modules may only be activated if they are built in a housing and are scoop-proof.
- Devices which are operated with external voltage - especially mains voltage - may only be opened when they have been disconnected from the voltage source or mains.
- All connecting cables of the electronic devices must be checked for damage regularly and must be exchanged if damaged.
- Absolutely comply to the regular inspections required by law according to VDE 0701 and 0702 for line-operated devices.
- Tools must not be used near or directly at concealed or visible power lines and conductor paths and also not at and in devices using external voltage – especially mains voltage - as long as the power supply voltage has not been turned off and all capacitors have been discharged. Electrolytic capacitors can be still charged for a long time after turning off.
- When using components, modules, devices or circuits and equipment the threshold values of voltage, current and power consumption specified in the technical data must absolutely be complied to. Exceeding these threshold values (even if only briefly) can lead to significant damage.
- The devices, components or circuits described in this manual are only adapted for the specified usage. If you are not sure about the purpose of the product, please ask your specialized dealer.
- The installation and setup have to be carried out by professional personnel.

Factory returning of old equipment

According to German law concerning electronic devices old devices cannot be disposed off as regular waste. Our devices are classified for commercial use only. According to § 11 of our general terms of payment and delivery, as of November 2005, the purchasers or users are obliged to return old equipment produced by us free of cost. FunkTronic GmbH will dispose of this old equipment at its own expense according to regulations.

Please send old equipment for disposal to:

**FunkTronic GmbH
Breitwiesenstraße 4
36381 Schlüchtern**

>>> Important hint: freight forward deliveries cannot be accepted by us.


February 2nd , 2006

Subject to change, Errors excepted

Terms and abbreviations

Line 2-wire cable
Radio 2-way-radio

Z_R Reference impedance,
this is the same as a real 2-wire-cable according to German TBR 15

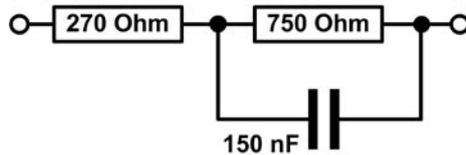

2D 2 wire
4D 4 wire
 Z_r Complex impedance according to German TBR
600 Real impedance 600 Ohm according to German TBR
AC Remote control via AC voltage
DC Remote control via DC voltage
IN Input
OUT Output
I/O In- and output
SDA I2C-Bus Data
SCL I2C-Bus Clock
TXD RS232 Transmitter
RXD RS232 Receiver
PTT Push To Talk
DSP Digital Signal Processor
FT FunkTronic

Revision remarks

Modifications made are only mentioned in note form in this section. For detailed information please read the corresponding chapters.

30.06.2010 - Translation

06.08.2013 - Register 52/4 changed, registers 57 and 83 added